

Incremental Planning of Multi-layer Elastic Optical Networks

P. Papanikolaou, K. Christodouloupoulos, and E. Varvarigos

School of Electrical and Computer Engineering, National Technical University of Athens, Greece

Emails: {ppapanikola, kchristo, vmanos}@mail.ntua.gr

Abstract— Traditionally, network upgrade cycles are long and performed independently for the IP edges and the optical transport layers. The traffic in metro and core networks is forecasted to grow in volume but also in dynamicity and the network operators face the challenge of shorter upgrades, influencing the cost efficiency and suppressing the return of investment. Thus, it is imminent to adopt a multi-period network planning approach and account jointly for the upgrade of the optical but also the IP edges of the network. In this work we formulate the problem of the incremental joint multi-layer planning of an IP over elastic optical network (EON) and propose an ILP formulation to solve it. Our objective is to deploy in a period the minimum additional network resources to cope with the changed traffic (CapEx) from the previous period, but also to minimize the changes for the transition between the two periods (OpEx). Simulation results based on realistic network scenarios validate the proposed planning approach.

Index Terms—Elastic optical networks; incremental capacity planning; joint multi-layer network planning.

I. INTRODUCTION

We are witnessing a significant change in Internet usage with multimedia traffic, mainly video, and cloud services, occupying the major share of the available capacity. These services have a high peak-to-average ratio, and exhibit quite dynamic changes with respect to time and location [1]. Future 5G networks will engender a wide range of new services with extreme requirements, such as ultrahigh-definition video streaming, augmented and virtual reality, cloud gaming, smart homes, etc. For the evolution toward 5G, it is envisioned that optical networking will play a major role in supporting the requirements, while reducing the deployment costs [2].

According to the conventional approach, optical transport networks have long upgrade cycles. In order to ensure that the resulting network design can cope with future traffic until the next upgrade cycle, the capacity is overprovisioned with some forecast. Nevertheless, these forecasts fail to capture traffic dynamicity and changes that heavily influence cost efficiency (equipment cost decrease due to technology maturation). Moreover, another factor that contributes to overprovisioning is that the optical network and the IP edges are upgraded independently. Capacity overprovisioning, results in underutilized equipment and unnecessary investments for long periods of the network lifecycle.

To meet the increasing and more dynamic traffic requirements telecom operators are facing the problem of shorter upgrade cycles which suppress the return of investment (ROI). The introduction of Elastic Optical

Networks (EON) and bandwidth variable transponders (BVT), enable a re-configurable optical network [3]. Combining EON with the IP layer re-configurability can facilitate a pay-as-you-grow approach, where few equipment is installed and continuously re-optimized and upgraded in shorter cycles. However, this has to be done in a coordinated manner for both IP and optical segments.

Multi-layer network optimization [4 - 6] and multi-period network planning [7 - 11] have been active research subjects in the last few years. Design algorithms for IP over (elastic or fixed) optical networks have received a great deal of attention. In [4] the authors highlight the fundamental role played by the design process in optimizing the base IP topology and introduce router bypass that leads to significant cost savings. In order to reduce the aggregation level of the incoming flows the authors in [5] exploit the EON technology's finer granularity to allow grooming at the optical layer. Taking advantage of that, they propose a new architecture to design national IP/MPLS networks interconnected through an EON core. The authors in [6] examine the planning problem of a multi-layer IP over EON from the perspective of CapEx minimization taking into account modular IP/MPLS routers at the optical network edges along with BVTs.

Multi-period planning is an eminent approach to obtain cost optimization for transport networks in a long term time frame. There are two approaches for multi-period planning, (i) global optimization assuming knowledge of the traffic for all periods [7 - 8], or (ii) incremental planning [9 - 11]. Authors in [7] incorporate multi-layer and multi-period planning in a single optimization step. In their attempt to study the migration scenario from a networking point of view, authors in [8] propose a single-layer ILP model. Multi-period planning is used to study the migration from 10G to 40G services and investigate the optimal deployment channel mix as a function of the reach and equipment prices.

To quantify the degree of traffic dynamics and growth that justify the higher initial investment in (flex-rate) BVT technology the authors in [9] propose an ILP model. This model performs multi-period analysis that accounts for the requirements for hardware provisioning in multiple periods with increasing traffic. In order to achieve savings compared to current provisioning practice with End-of-Life physical layer margins, the authors in [10] present an algorithm that provisions lightpaths considering the actual physical performance and use it in a multi-period planning scenario to postpone equipment deployment. In a similar concept the authors in [11] model the progressive ageing of the transmission channel and quantify the benefits of dynamically adjusting the BVT to the physical network quality.

In this paper, we take an incremental planning approach for the joint planning of a multi-layer IP over EON network. We adopt an incremental approach, since traffic is becoming more dynamic and unpredictable with the advent of new services and 5G technology. Thus, it seems hard to have a priori knowledge of the exact traffic at intermediate periods for the entire network lifecycle, but rather good forecasts for short-term volume growth. Our objective is to deploy at each period the minimum amount of additional network resources so that we are able to cope with traffic changes from the previous period, optimizing both the capital expenditure (CapEx) of the equipment used and the operational expenditure (OpEx) associated with the changes imposed by the transition between the two periods. Taking into account aspects such as technology maturation and equipment depreciation we can use the developed solution to perform what-if studies and identify the right times for introducing new technologies and implementing appropriate changes on the network.

Even though multi-layer network optimization and multi-period network planning were extensively researched, there is no formal description and optimal solution of the combination of these planning approaches, to the best of our knowledge. The main novelties of this work are the following. Firstly, we propose an optimization model that jointly considers multi-layer and incremental planning. Secondly, the proposed model introduces a penalty on the reconfiguration of existing lightpaths, to restrict the extent of modifications performed between periods. Thirdly, the problem definition and the proposed optimization model is quite general, can be used for planning of an IP over optical network with any mix or fixed or tunable transponders. The model takes as input realistic transmission specifications and considers quite accurately the IP layer, through a detailed model for the IP/MPLS routers deployed at the edges of the optical network.

The rest of the paper is organized as follows. In Section II we formally state the incremental planning of a multi-layer IP over EON problem. Section III describes the mathematical formulation of the ILP model to solve the problem. Performance results are presented in Section IV. Our conclusions follow in Section V.

II. PROBLEM STATEMENT

In this section we describe the architecture of the multilayer IP over elastic optical network (EON) and define the incremental planning problem of such a network.

A. IP-over-Elastic Optical Network Architecture

We assume an EON domain that consists of optical switches and fiber links. The fiber links consist of SMF spans and EDFAs. The optical switches function as Reconfigurable Optical Add Drop Multiplexers (ROADMs) employing the flex-grid technology, and support optical connections (lightpaths) of one or more contiguous 12.5 GHz spectrum slots. Note that the solutions to be proposed will also be valid for fixed-grid WDM networks (50 GHz wavelengths), which can be considered as a special and simpler case of EONs. At each optical switch, none, one or more IP/MPLS routers are connected, which comprise the edges of the optical domain. An IP/MPLS router is connected to the ROADM via a grey transceiver. Bandwidth Variable Transponders (BVTs) are

plugged to the ROADMs to transform the client signal for optical long-haul transmission.

The transponder, functioning as a transmitter, transforms the electrical packets coming from the IP source router to optical signals (E/O conversion). Then the traffic entering the ROADM is routed over the optical network in all-optical connections (lightpaths). We assume that a number of transmission parameters of the BVTs and the regenerators are under our control, affecting the rate and reach at which they can transmit. The lightpath passes transparently or translucently (if the use of regenerators is required) intermediate ROADM and reaches the lightpaths' destination ROADM where it is dropped. Note that this can be the final destination or an intermediate hop in this domain. The signal is converted back to electrical at the transponder that functions as the optical receiver (O/E conversion) and the packets are forwarded and handled by the corresponding IP/MPLS router. We assume that lightpaths are bidirectional and thus in the above description an opposite directed lightpath is also installed, and the transponders act simultaneously as transmitters and receivers. The same applies to the grey transceivers and the router ports. If the IP/MPLS router that is reached is the final destination of the IP/MPLS connection in the domain, the packets are forwarded to the next domain. If it is an intermediate hop, the packets are re-routed back to the optical network, over a new lightpath and through possible more intermediate IP/MPLS router hops towards the domain destination.

From the optimization point of view, the network consists of two layers, the IP (or virtual) layer and the optical (or physical) layer. The optical lightpaths are installed taking into account the physical topology, and create the virtual topology, on top of which the IP/MPLS connections are installed.

B. Incremental Multi-layer Network Planning

For considering the operation time horizon of a network, there are two planning approaches: (i) global and (ii) incremental. In this study we focus on incremental planning. We assume that the upgrade process of the multi-layer network is performed periodically and takes decision on how to support the traffic for the next planning period, given the current state of the network. So, the assumption is that this process is performed successively and separately for each period, having the knowledge of only the traffic of the next period and no further future knowledge.

Traditionally, optical networks have long upgrade cycles. Due to the forecasts used for long periods spare capacity is installed, the system is utilized below its actual performance leading to a significant increase in network expenditures. Moreover, overprovisioning is also due to different cycles in IP and the optical layers upgrades. Since long and independent cycles fail to capture emerging traffic requirements, in this work we adopt an incremental short-cycle multi-layer planning approach. Few equipment is installed at both IP and optical layers and the network is continuously re-optimized and upgraded.

In the initial planning period (Period t_0) both (IP and optical) layers are simultaneously optimized with the objective being the minimization of the cost. Algorithms such as [12], can be used for this step. Assuming a period t_N the incremental model takes as input the new traffic and the

previous state of the network at t_{N-1} , including the state of the resources (established lightpaths and IP tunnels) and information about physical resources (installed/available equipment and its location). The optimization process jointly considers the previous network state and both its layers with the objective being the minimization of both the added network equipment (CapEx) and the equipment displacements and re-configuration between the two successive network states (OpEx).

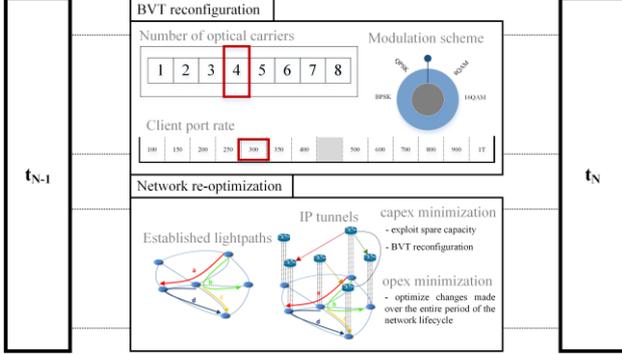


Fig. 1. Incremental multi-layer planning of EONs.

As shown in Fig. 1 the proposed model exploits the flexibility of BVTs that can be used in numerous different configurations to carry client traffic. This allows an initial design that is scalable through the years, since it is possible to increase client's port rate by increasing, when available, the number of optical carriers or by using higher order modulation formats. This would be applied in subsequent periods, combined possible with the addition of regenerators (since higher order modulation formats entail a decrease in the optical reach) and the possible displacement of the already installed ones. Additionally, network resources can be made available by re-optimization of the previous network state exploiting the IP grooming capabilities to enable spare capacity utilization.

The proposed model jointly considers multi-layer and incremental planning, taking into account technology maturation and price reductions. In order to achieve cost savings through incremental network planning it is essential to adopt short network cycles, which are able to capture the effects of traffic dynamicity and avoid overprovisioning by incorporating small but frequent network updates. The challenge is therefore to optimize the changes made, minimizing the costs incurred over the entire period of the network lifecycle.

III. MATHEMATICAL FORMULATION

In the ILP model presented below multi-layer and multi-period planning are jointly considered in a single optimization step. For each period both network layers are simultaneously optimized by taking into account the previous network state. The extend to which the current state will commit to the previous one is controlled through a parameter, W_d , passed as input to the model.

We assume that the network is represented by a graph $G(V,L)$, with V being the set of nodes and L the set of bidirectional fiber links connecting two locations. The nodes of the the graph correspond to the optical nodes of the network on which we also account for the cost of the IP/MPLS connected router. We are also given the traffic matrix A ,

where A_{sd} corresponds to IP demanded capacity between nodes (s,d) . We are also given the model of the IP/MPLS routers (chassis and line-cards) and the transmission capabilities of the transponders, described in what are called transmission-tuples. Each tuple t represents a specific configuration of the transponder (rate, spectrum) and is related to a specific transmission reach, taking into account a model for the optical physical layer (e.g. GN model [13]). The network designs are based on pre-calculated optical paths. In particular, we assume that for each 2 pair of nodes (i,j) we precalculate k -paths which define the set P_{ij} . We also assume that a path-transmission tuple (p,t) is feasible either if the transmission reach of tuple t is higher than the length of the path p , or by placing regenerators over the path at the node before quality of transmission (QoT) becomes unacceptable.

The inputs of the problem are stated in the following:

- The network topology represented by graph $G(V,L)$.
- The maximum number Z of available spectrum slots (of 12.5 GHz)
- The traffic described by the traffic matrix A .
- A set B of the available transponders (BVTs).
- A set T of feasible transmission tuples, which represent the transmission options of the available transponders, with tuple $t=(D_t,R_t,S_t,C_t)$ indicating feasibility of transmission at distance D_t , with rate R_t (Gpbs), using S_t spectrum slots, for the transponder of cost C_t . Also, T_b represents the transmission tuples of transponder $b \in B$.
- A set of line-cards represented by H , where a line-card for transponder $b \in B$ is represented by a tuple $h_b=(N_h,C_h)$, where N_h is the number of transponders of type b that the line-card supports.
- The IP/MPLS router cost, specified by a modular cost model. We assume that an IP/MPLS router consists of line-card chassis of cost C_{LCC} , that support N_{LCC} line-cards each, and fabric card chassis of cost C_{FCC} , that support N_{FCC} line-card chassis.
- The weighting coefficient, W_c , taking values between 0 and 1. Setting $W_c = 1$ minimizes solely the cost whereas setting $W_c \approx 0$ minimizes the maximum spectrum used.
- The weighting coefficient, W_d , taking values between 0 and 1. Setting $W_d = 1$ minimizes solely the current state cost ignoring the previous network state, whereas setting $W_d \approx 0$ maintains the previous state lightpaths and minimizes any additional cost to that.

Variables:

- f_{sd}^p Float variables, equal to the rate of the IP tunnel from IP source s to destination d that passes over a lightpath that uses path p .
- x_{pt} Integer variables, equal to the number of lightpaths of path-transmission tuple pairs (p,t) used.
- y_{nh} Integer variables, equal to the number of line-cards of type h at node n .
- q_n Integer variables, equal to the number of line-card chassis at node n .
- o_n Integer variables, equal to the number of fabric-card chassis at node n .
- z Integer variable, equal to the maximum indexed spectrum slot.
- θ_{nb} Integer variables, equal to the number of utilized transponders of type b at node n .

- v_{nb} Integer variables, equal to the number of deployed transponders of type b at node n .
- d_{pt} Integer variables, equal to the number of removed (p,t) tuples from the previous state.
- c Float variable, equal to the cost of network equipment.

Constants:

- F_{sd}^{ip} Integer constants, equal to the IP traffic of end-nodes s to d that is transferred over optical path p in the previous network state.
- X'_{pt} Integer constants, equal to the number of lightpaths of path-transmission tuple pairs (p,t) used in the previous network state.
- Θ'_{nb} Integer constants, equal to the number of transponders of type b at node n used in the previous network state.

Objective:

$$\min (W_c \cdot c + (1 - W_c) \cdot z) \quad (1)$$

- Cost calculation constraints:

$$c = W_d \cdot \left(\sum_{n \in V} \sum_{b \in B} C_b \cdot v_{nb} + \sum_{n \in V} \sum_{h \in H} C_h \cdot y_{nh} \right) + \sum_{n \in V} C_{LCC} \cdot q_n + \sum_{n \in V} C_{CH} \cdot o_n + (1 - W_d) \cdot \sum_{p \in P} \sum_{t \in T \ni (p,t)} d_{pt} \quad (2)$$

- IP flow continuity constraints:

$$\forall (s,d) \in V^2, n \in V$$

$$\left(\sum_{i \in V} \sum_{p \in P_{in}} f_{sd}^p - \sum_{j \in V} \sum_{p \in P_{ij}} f_{sd}^p \right) = \begin{cases} -\Lambda_{sd}, & n = s \\ \Lambda_{sd}, & n = d \\ 0, & n \neq s, d \end{cases} \quad (3)$$

- Path-transmission tuple assignment constraints:

$$\forall (i,j) \in V^2$$

$$\sum_{sd \in V^2} f_{sd}^p \leq \sum_{p \in P_{ij}} \sum_{t \in T \ni (p,t)} (R_t \cdot x_{pt}) \quad (4)$$

- Previous state constraints (optical layer):

$$\forall \text{feasible}(p,t)$$

$$d_{pt} \geq X'_{pt} - x_{pt} \quad (5)$$

- Utilized transponders constraints:

$$\forall n \in V, b \in B$$

$$\theta_{nb} = \sum_{p \text{ starts at } n} \sum_{t \in T_b} x_{pt} \quad (6)$$

- Deployed transponders constraints:

$$\forall n \in V, b \in B$$

$$v_{nb} \geq \theta_{nb} \quad (7)$$

$$v_{nb} \geq \Theta'_{nb} \quad (8)$$

- Previous state constraints (IP layer):

$$\forall (s,d) \in V^2, (i,j) \in V^2, p \in P_{ij} \mid F_{sd}^{ip} > 0,$$

$$f_{sd}^p > F_{sd}^{ip} \quad (9)$$

- Maximum spectrum slot used constraints:

(z^l equals to the maximum indexed spectrum slot used in each bidirectional fiber link)

$$\forall l \in L, (i,j) \in V^2,$$

$$z^l = \sum_{p \in P_{ij} \mid l \in p} \sum_{t \in T \ni (p,t)} (S_t \cdot x_{pt}) \quad (10)$$

$$z = \max (z^l)$$

$$z \leq Z$$

- Number of line-cards per node constraints:

$$\forall n \in V, h \in H$$

$$y_{nh} \geq \sum_{b \text{ is supported by } h} v_{nb} / N_h \quad (11)$$

- Number of line-card chassis per node constraints:

$$q_n \geq \sum_h y_{nh} / N_{LCC}, \forall n \in V \quad (12)$$

- Number of fabric card chassis per node constraints:

$$o_n \geq q_n / N_{CH}, \forall n \in V \quad (13)$$

The joint multi-layer planning ILP formulation presented above dimensions the network for normal operation. The algorithm creates the solution by choosing among k (pre-calculated) optical paths P_{ij} between optical nodes i,j . Apart from other variables, we assume that the solution includes values for IP flow variables f_{sd}^p , which identify the amount of IP traffic of end-nodes s to d that is transferred over optical path p . Variables x_{pt} may correspond to a lightpath (p,t) that serves transparently an end-to-end demand between the given source s ($=i$) and destination d ($=j$), or to a series of lightpaths that compose a translucent connection. The cost of the IP/MPLS routers is captured through variables y_{nh} , q_n and o_n . The objective is to minimize a weighted sum of the maximum spectrum and the cost of the equipment used in both layers (Eq. 1). The cost function (Eq. 2) is chosen as the weighted sum of the variables capturing the CapEx of the equipment used in both layers of the network in the current state and the variables representing the number of removed (p,t) path-transmission tuples from the previous state (Eq. 6), which capture the OpEx associated with the transponders displacements or re-configurations. Constraints (3), (4) and (10)–(13) deal with the joint multi-layer planning problem, while constraints (5)–(9) address the incremental planning problem.

In order to reduce the model complexity and obtain optimal results for realistic network sizes, the ILP only ensures that the maximum spectrum slot used in the network (z) is within the range of the available spectrum slots (Z) in Eq. (10). So in the above ILP model we do not perform the spectrum assignment. The model can be extended to jointly perform that, but the gains in optimization were observed to be small. So for simplicity and to enable to run the ILP model in large network instances, the spectrum assignment is performed in a subsequent step using a modified Hungarian method [14].

IV. PERFORMANCE RESULTS

In this section we evaluate the performance of the incremental multilayer planning algorithm presented in Section III. In particular, we compare the following three scenarios:

- Plan the whole network from scratch at each period, without taking into account the previous network state

(denoted as $J\text{-}ML$).

- Incrementally plan the network without being able to perform any change from the previous network state (denoted as Inc). This restriction applies to both IP and optical layers, limiting the transponder reconfiguration and IP grooming capabilities.
- Incrementally plan jointly the multi-layer network to optimize both the added equipment (CapEx) at each period and the number of changes made (OpEx), using the proposed algorithm (Section III). We examined two scenario variations, by varying the parameter W_d which controls the ability to deviate from the previous network state: $W_d=0$ (denoted as $Inc\text{-}ML$), and $W_d=0.5$ (denoted as $J\text{-}Inc\text{-}ML$). When $W_d=0$ ($Inc\text{-}ML$), the model is not able to perform any change in the optical layer (*lightpaths*) of the previous network state. When $W_d=0.5$ ($J\text{-}Inc\text{-}ML$) the model equally optimizes the CapEx of the added equipment and the OpEx associated with the transition changes between the two states.

In our simulations we used the Deutsche Telekom topology (DT), so that the results obtained are representative of real networks. The traffic matrix of the DT network is realistic as provided by the operator (DTAG) in [15]. The traffic was projected from year 2016 for 10 years, with a step of 1 year, assuming a uniform 35% increase per year.

BVT 1				BVT 2			
Capacity (Gb/s)	Reach (km)	Data slots	cost (c.u.)	Capacity (Gb/s)	Reach (km)	Data slots	cost (c.u.)
100	2000	4		500	950	7	
150	1350	4		600	800	8	
200	1050	5		700	700	9	2*
250	950	5	1.76	800	650	11	
300	700	6		900	550	12	
350	600	6		1000	450	14	
400	450	6					*available from 2020

We assume that each link of the reference networks is a single fiber with 360 spectrum slots of 12.5 GHz width. We assumed that there are available 2 types of BVTs, the first with maximum rate of 400 Gbps and the second of 1Tbps, the later was made available after year 2020. The transmissions configuration (tuples) of the BVTs are presented in TABLE I. The cost of BVTs and the cost model of IP/MPLS routers are based on the cost models defined by IDEALIST project [15]. We view an IP/MPLS router as a modular device, built out of (single or multi) chassis. A chassis provides a specified number of bi-directional slots with a nominal transmission speed. Into each router slot, a linecard of the corresponding speed can be installed. Each linecard provides a specified number of ports at a specified speed and occupies one slot of the IP/MPLS router. We assumed that for every BVT configuration there is an available linecard type. We also consider a scalable multi-chassis core router, with up to 72 chassis, and a 16 router slot capability per chassis.

In order to estimate accurately the incremental cost of the equipment used during the entire network lifecycle we have to consider technology maturation, which leads to depreciation of the equipment over time. In our study we assume a depreciation of 10% per year for all equipment.

A. Capital Expenditure and spectral impact

In this section we compare the different planning scenarios with respect to the cost (Fig. 2.a) and spectral resource utilization (Fig. 2.b). We use $J\text{-}ML$ as benchmark for the

comparison, since planning the network from scratch without taking into account the previous network state obviously leads to the optimum (lowest) CapEx, but it is not a realistic approach. The Inc technique, due to its inability to fully exploit the reconfigurability of the IP and optical equipment exhibits in all periods, the worst performance. The $J\text{-}Inc\text{-}ML$ approach jointly considers multi-layer and incremental planning, introducing a penalty on the reconfiguration of existing lightpaths. By adjusting the reconfiguration penalty we examine the trade-off between CapEx minimization of equipment used in each period and OpEx associated with the equipment displacements and reconfigurations between the network states.

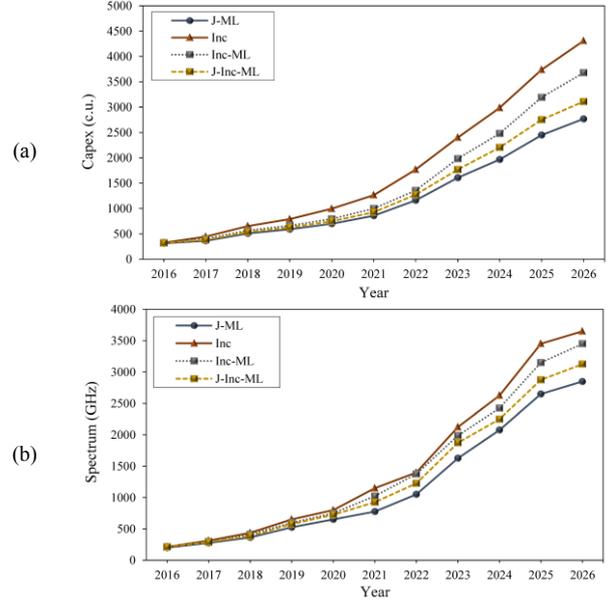


Fig. 2. (a) Evolution of capital expenditure per period, (b) maximum spectrum used per period for years 2016-2026.

More specifically, Fig. 2.a shows that $J\text{-}Inc\text{-}ML$ achieves CapEx savings that range between 15% and 38% when compared to Inc and savings that range between 5% and 18% when compared to $Inc\text{-}ML$. The savings come from the limited reconfiguration capabilities of the Inc and $Inc\text{-}ML$ at both or only the optical layers, respectively. Note that the savings increase as time advances since the bad choices made by Inc and $Inc\text{-}ML$ aggregate and are not corrected as time advances. Moreover, the proposed $J\text{-}Inc\text{-}ML$ solution adds equipment when required, taking advantage of price depreciations. Note that the difference between Inc and $Inc\text{-}ML$ is that the later allows reconfiguration at the IP layer (grooming). As IP-layer equipment comprises up to 70% of the total CapEx, savings on the IP-layer are deemed more significant in a multi-period perspective. Taking as reference the $J\text{-}ML$ that achieves the optimal CapEx (plans the network from scratch without taking into account the previous state), we observe that the proposed $J\text{-}Inc\text{-}ML$ solution achieves CapEx close to the optimal. Note that the proposed solution tradeoffs network equipment reconfiguration for CapEx. By appropriate selecting W_d parameter, we can find solutions with CapEx ranging from the highest achieved by the Inc scenario to the lowest achieved by the $J\text{-}ML$ scenario, with a wide or limited network reconfiguration, respectively (as discussed in the next Subsection).

Similarly to the CapEx metric, Fig. 2.b shows that the proposed $J\text{-}Inc\text{-}ML$ achieves spectrum savings that range

between 9% and 29% when compared to *Inc* and savings that range between 4% and 14% when compared to *Inc-ML*. The savings are slightly lower compared to CapEx due to deployment of more regenerators for *Inc* and *Inc-ML* for long paths, which provide wavelength conversion possibilities.

B. Lightpaths establishment analysis and cost breakdown

In this section we focus on capturing the trade-off between CapEx minimization of the equipment used in the current state and the minimization of OpEx associated with the equipment displacements and reconfigurations between network states. Figures 3.a and b presents the number of reconfigured and added lightpaths per period, respectively. As stated, *J-ML* is agnostic to the previous state of the network, leading to the optimum CapEx achieved through an extensive reconfiguration of already established lightpaths. Figure 3.a shows that the proposed joint incremental multi-layer *J-Inc-ML* approach limits the number of lightpath reconfigurations and establishing of new lightpaths, and consequently controls the corresponding OpEx. The proposed technique (*J-Inc-ML*) achieves a significant reduction, of the order of 50%, of the reconfiguration processes, while maintaining a relatively small number of added lightpaths per period, which is only 18% larger than the one achieved by *J-ML* (Fig. 3.b).

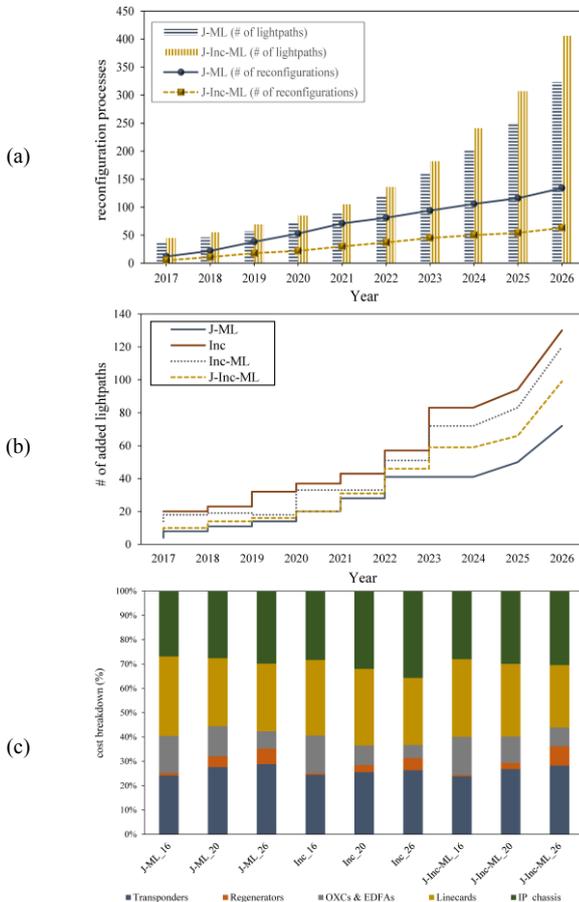


Fig. 3. (a) Reconfiguration overhead in the optical layer for *J-ML* and *J-Inc-ML* scenarios, (b) number of added lightpaths per period and (c) cost breakdown of the network for *J-ML*, *Inc*, *Inc-ML* and *J-Inc-ML* scenarios.

No significant differences are observed in the cost breakdown for the three planning scenarios (Fig. 3.c), which is expected as uniform cost decrease is assumed for all layers. Only in the *J-Inc-ML* case an increase in the cost of the regenerators is depicted, which arises as a result of the deployment of more translucent paths that in turn result to IP

ports reduction. What is also interesting to note for the *Inc* approach is the increased cost for the router chassis for medium and high traffic which comes as a result of the increased number of transponders (and consequently IP ports) that leads to the deployment of multi-chassis configurations.

V. CONCLUSIONS

The inevitable growth of the traffic to be transported by optical backbone networks, both in volume and in dynamicity cause tremendous pressure on network infrastructures, accentuating the need for planning methods that increment the capacity of optical networks in timely manner. In view of this, planning the network in an incremental multi-layer approach was proposed in this paper. Through an ILP formulation we exploit optimally the reconfigurability of BVTs and modular IP/MPLS router architectures, with the objective being the minimization of the added equipment (CapEx) at each period and the equipment displacements and re-configurations (OpEx) in two consecutive periods. We evaluated the performance under realistic network scenarios and verified that the proposed solution can tradeoff network equipment reconfiguration for CapEx.

ACKNOWLEDGMENT

This research is partially funded by the European Union (European Social Fund - ESF) and Greek national funds through the program of NSRF action "Human Resources Development, Education and Lifelong Learning".

REFERENCES

- [1] "Cisco visual networking index: Forecast and methodology, 2015–2020," Cisco White Paper, 2016.
- [2] I. Tomkos, F. Effenberger, J. K. K. Rhee, "Introduction to the special issue on optical networking for 5G mobile and wireless communications," IEEE/OSA J. of Opt. Com. and Netw., 2016.
- [3] M. Jinno, H. Takara, B. Kozicki, Y. Tsukishima, Y. Sone and S. Matsuoka, "Spectrum-efficient and scalable elastic optical path network: architecture, benefits, and enabling technologies," IEEE Com. Mag., 2009.
- [4] O. Gerstel, C. Filsfils, T. Telkamp, M. Gunkel, M. Horneffer, V. Lopez, A. Mayoral, "Multi-layer capacity planning for IP-optical networks," IEEE Com. Mag., 2014.
- [5] L. Velasco, P. Wright, A. Lord, G. Junyent, "Saving CAPEX by extending flexgrid-based core optical networks toward the edges [invited]," IEEE/OSA J. of Opt. Com. and Netw., 2013.
- [6] V. Gkamas, K. Christodouloupolous, E. Varvarigos, "A Joint Multi-Layer Planning Algorithm for IP Over Flexible Optical Networks," IEEE/OSA J. of Light. Techn., 2015.
- [7] E. Palkopoulou, C. Meusburger, D. Schupke, L. Wosinska, T. Bauschert, "Combining multi-period and multi-layer network planning: Ignored potential?," ECOC, 2010.
- [8] C. Meusburger, D. A. Schupke, A. Lord, "Optimizing the Migration of Channels With Higher Bitrates," IEEE/OSA J. of Light. Techn., 2010.
- [9] A. Eira, J. Pedro, J. Pires, "Optimal multi-period provisioning of fixed and flex-rate modular line interfaces in DWDM networks," in IEEE/OSA J. of Opt. Com. and Netw., 2015.
- [10] P. Soumplis, K. Christodouloupolous, M. Quagliotti, A. Pagano, E. Varvarigos, "Actual Margins Algorithm for Multi-Period Planning". OFC, 2016.
- [11] J. Pestic, T. Zami, P. Ramantanis, S. Bigo, "Faster return of investment in WDM networks when elastic transponders dynamically fit ageing of link margins," OFC, 2016.
- [12] P. Papanikolaou, K. Christodouloupolous, E. Varvarigos, "Multilayer flex-grid network planning," ONDM, 2015.
- [13] P. Poggiolini, "The GN Model of Non-Linear Propagation in Uncompensated Coherent Optical Systems," IEEE/OSA J. of Light. Techn., 2012.
- [14] A. Schrijver, "Combinatorial Optimization: Polyhedra and Efficiency," Springer, 2003.
- [15] IDEALIST EU project, <http://www.ict-idealists.eu/>.